

# MOBILE SHELVING WITH GUIDANCE RAILS


**Principle** : combinations made up of 2 fixed shelving placed on the ends connected by 2 guide bars fixed on the upper sides. In the middle, several shelveings are arranged on fixed wheels turned to the inside, which can slide freely.

5 level shelvings, height 2050 mm, with polypropylene removable shelves. The assembly's length varies from 2,50 to 6 metres. A minimum access space of 80 cm must be provided between the shelvings.

To make an order, please provide a plan of the room, indicating the position of the shelving, the location of the doors and any existing evaporators.



GUIDANCE RAILS

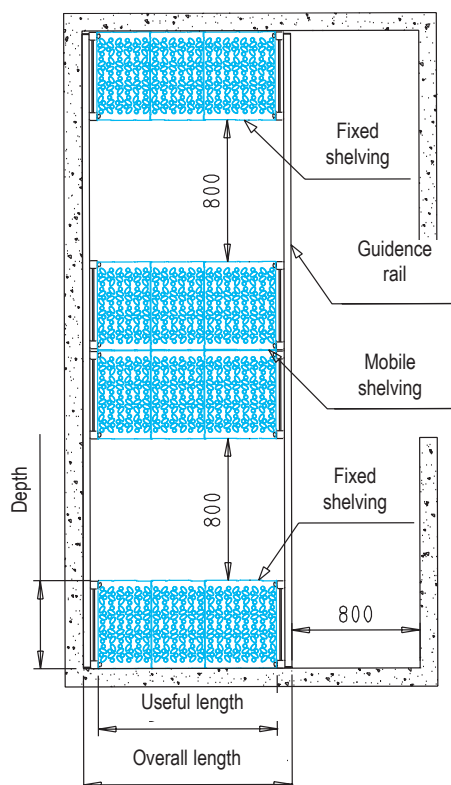

Useful lengths(mm)	Depth 500 mm	Depth 560 mm
1150	PLN1150MF	PLQ1150MF
1350	PLN1350MF	PLQ1350MF
1552	PLN1552MF	PLQ1552MF
1150	PLN1150MR	PLQ1150MR
1350	PLN1350MR	PLQ1350MR
1552	PLN1552MR	PLQ1552MR
2 guidance rails, linear meter*	604 900	604 901

\* Please specify the length (minimum 2,50 metres, maximum 6 metres)